


Cod: 113520020242906

**Ventilated refrigerated display unit 90° open straight black glass +2 +6 °C
116,3x116,3 cm height 106,4h cm**

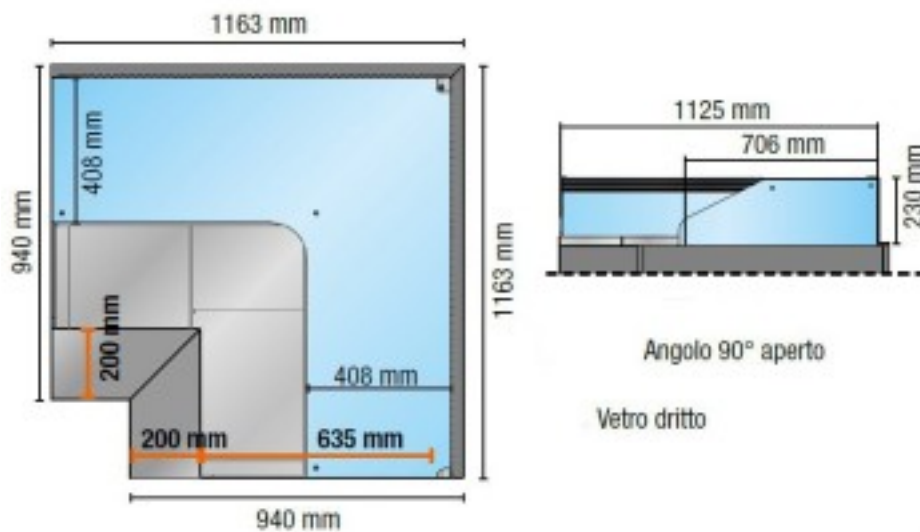

Description

Refrigerated version display unit, with straight tempered glass, 90° angled open. Equipped with 2 open compartments, complete with intermediate shelf/intermediate shelf. Suitable for displaying pastries and pralines. The product features: - Sheet metal side panels with tempered glass sides;- Electronic control panel;- Ceiling lamp with LED lighting;- No. 2 open compartments, complete with intermediate shelf;- Condensate evaporator tray equipped with PTC resistor;

Technical data

Alimentazione	Electric
Assorbimento a regime (dotazione standard)	0.41 kW

Assorbimento all'avviamento (dotazione standard)	0.44 kW
Classe climatica	3
Frequenza	50 Hz
Gas refrigerante	R452A
Potenza assorbita dall'illuminazione (dotazione standard)	0.02 kW
Refrigerazione	ventilated
Superficie espositiva	0.85 Mq
Temperatura d'esercizio	+2 +6 °C
Voltaggio	220 V, 240 V