


Cod: 113520020242907

Ventilated refrigerated display unit 90° open corner straight glass with intermediate shelf black +2 +6 °C 116,3x116,3 cm height 122,4h cm

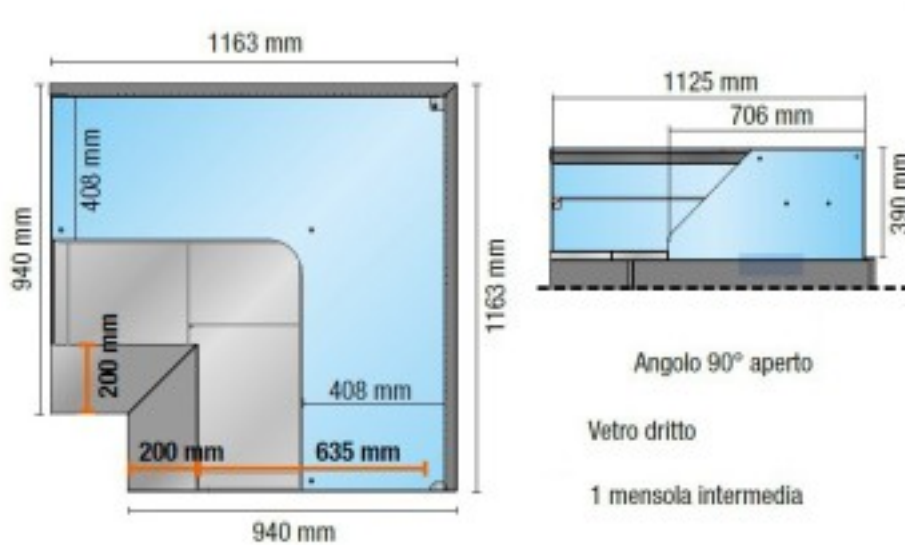

Description

Refrigerated version display unit, with straight tempered glass, 90° angled open. Equipped with 2 open compartments, complete with intermediate shelf intermediate shelf. Suitable for displaying pastries and pralines.

The product features:

- Sheet metal side panels with tempered glass sides;
- Electronic control panel;
- Ceiling lamp with LED lighting;
- 1 intermediate shelf in tempered glass complete with lighting;
- No. 2 open compartments, complete with intermediate shelf;
- Condensate evaporator tray equipped with PTC resistor;

Technical data

Alimentazione	Electric
Assorbimento a regime (dotazione standard)	0.41 kW
Assorbimento all'avviamento (dotazione standard)	0.44 kW
Classe climatica	3
Frequenza	50 Hz
Gas refrigerante	R452A
Potenza assorbita dall'illuminazione (dotazione standard)	0.02 kW
Potenza assorbita dall'illuminazione (mensola intermedia)	0.02 kW
Refrigerazione	ventilated
Superficie espositiva	1.67 Mq
Temperatura d'esercizio	+2 +6 °C
Voltaggio	220 V, 240 V