


Cod: 113590010242906

**Ventilated refrigerated display unit 90° angle open straight glass panes  
remote motor red +2 +2 +6 °C 116,3x116,3 cm height 106,4h cm**

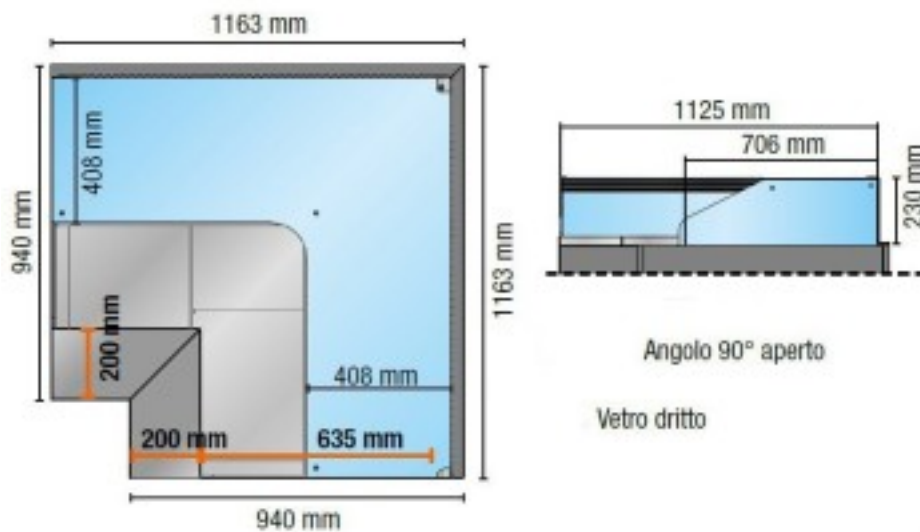

## Description

Refrigerated version display unit, with straight tempered glass, 90° angled open. Equipped with 2 open compartments, complete with intermediate shelf intermediate shelf. Suitable for displaying pastries and pralines.

The product features:

- Sheet metal side panels with tempered glass sides;
- Electronic control panel;
- Ceiling lamp with LED lighting;
- No. 2 open compartments, complete with intermediate shelf;
- Condensate evaporator tray equipped with PTC resistor;

## Technical data

Alimentazione	Electric
Assorbimento elettrico (dotazione standard)	0.01 kW
Classe climatica	3
Frequenza	50 Hz
Gas refrigerante	R452A
Potenza assorbita dall'illuminazione (dotazione standard)	0.02 kW
Potenza frigorifera	0.635 kW
Refrigerazione	ventilated
Superficie espositiva	0.85 Mq
Temperatura d'esercizio	+2 +6 °C
Voltaggio	220 V, 240 V