


Cod: 113590060242907

Ventilated refrigerated display unit, 90° open corner, straight glass panes, remote-controlled with intermediate shelf white +2 +6 °C 116,3x116,3 cm height 122,4h cm

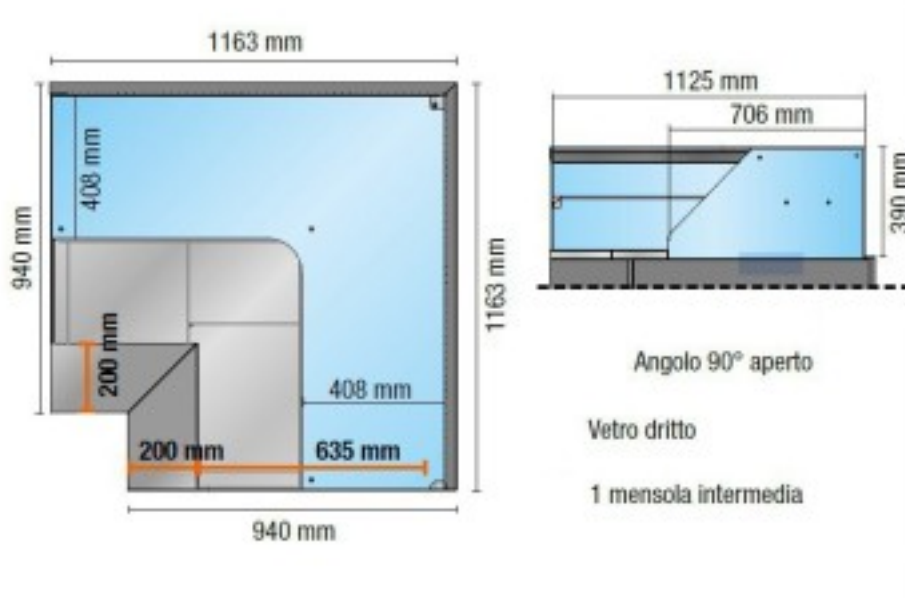

Description

Refrigerated version display unit, with straight tempered glass, 90° angled open. Equipped with 2 open compartments, complete with intermediate shelf intermediate shelf. Suitable for displaying pastries and pralines.

The product features:

- Sheet metal side panels with tempered glass sides;
- Electronic control panel;
- Ceiling lamp with LED lighting;
- 1 intermediate shelf in tempered glass complete with lighting;
- No. 2 open compartments, complete with intermediate shelf;
- Condensate evaporator tray equipped with PTC resistor;

Technical data

Alimentazione	Electric
Assorbimento elettrico (dotazione standard)	0.01 kW
Classe climatica	3
Frequenza	50 Hz
Gas refrigerante	R452A
Potenza assorbita dall'illuminazione (dotazione standard)	0.02 kW
Potenza assorbita dall'illuminazione (mensola intermedia)	0.02 kW
Potenza frigorifera	0.635 kW
Refrigerazione	ventilated
Superficie espositiva	1.67 Mq
Temperatura d'esercizio	+2 +6 °C
Voltaggio	220 V, 240 V