


Cod: 113590020242908

**Ventilated refrigerated display unit 90° open straight glass with 2 intermediate shelves remote black +2 +6 °C 116,3x116,3 cm height 138,4h cm**

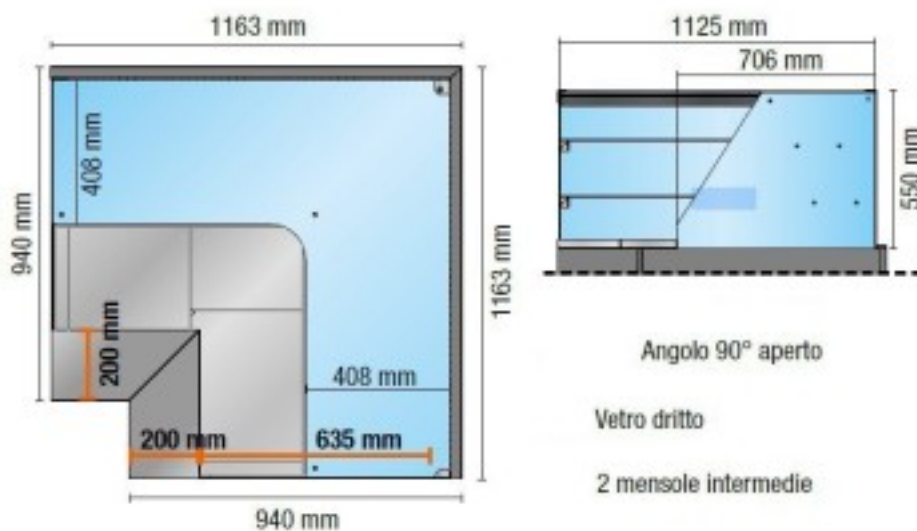

## Description

Refrigerated version display unit, with straight tempered glass, 90° angled closed. Equipped with 2 open compartments, complete with intermediate shelf intermediate shelf. Suitable for displaying pastries and pralines.

The product features:

- Sheet metal side panels with tempered glass sides;
- Electronic control panel;
- Ceiling lamp with LED lighting;
- 2 intermediate shelves in tempered glass complete with lighting;
- No. 2 open compartments, complete with intermediate shelf;
- Condensate evaporator tray equipped with PTC resistor;

## Technical data

Alimentazione	Electric
Assorbimento elettrico (dotazione standard)	0.01 kW
Classe climatica	3
Frequenza	50 Hz
Gas refrigerante	R452A
Potenza assorbita dall'illuminazione (dotazione standard)	0.02 kW
Potenza assorbita dall'illuminazione (mensola intermedia)	0.04 kW
Potenza frigorifera	0.635 kW
Refrigerazione	ventilated
Superficie espositiva	2.21 Mq
Temperatura d'esercizio	+2 +6 °C
Voltaggio	220 V, 240 V